



PROPRIETARY
 THE INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS CONSIDERED PROPRIETARY BY STRATEDGE CORPORATION. THE ITEMS AND INFORMATION CONTAINED OR DISCLOSED HEREIN SHALL NOT BE USED, COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR SHALL THE CONTENTS BE REVEALED IN ANY MANNER TO ANY PERSON UNLESS WRITTEN PERMISSION IS FIRST OBTAINED FROM STRATEDGE CORPORATION.

NOTES, UNLESS OTHERWISE SPECIFIED:

- 1. BASE MATERIAL CMC 1:3:1.
- 2. CERAMIC SHALL BE 96% Al₂O₃.
- 3. LEAD, BASE, AND CERAMIC GOLD PLATING THICKNESS SHALL BE 50 MICRONS MINIMUM, MEASURED ON MAJOR FLATS.
- 4. LEAD, BASE, AND CERAMIC NICKEL UNDERPLATE SHALL BE 100 TO 350 MICRONS, MEASURED ON MAJOR FLATS.
- 5. PACKAGE WILL BE SUPPLIED ON A LEAD FRAME. LEAD FRAME WILL BE SUITABLE FOR MINIMUM LEAD LENGTH OF .10" AFTER TRIM.
- 6. LID: REFERENCE STRATEDGE PART NUMBER RP3535-075-001(200046).

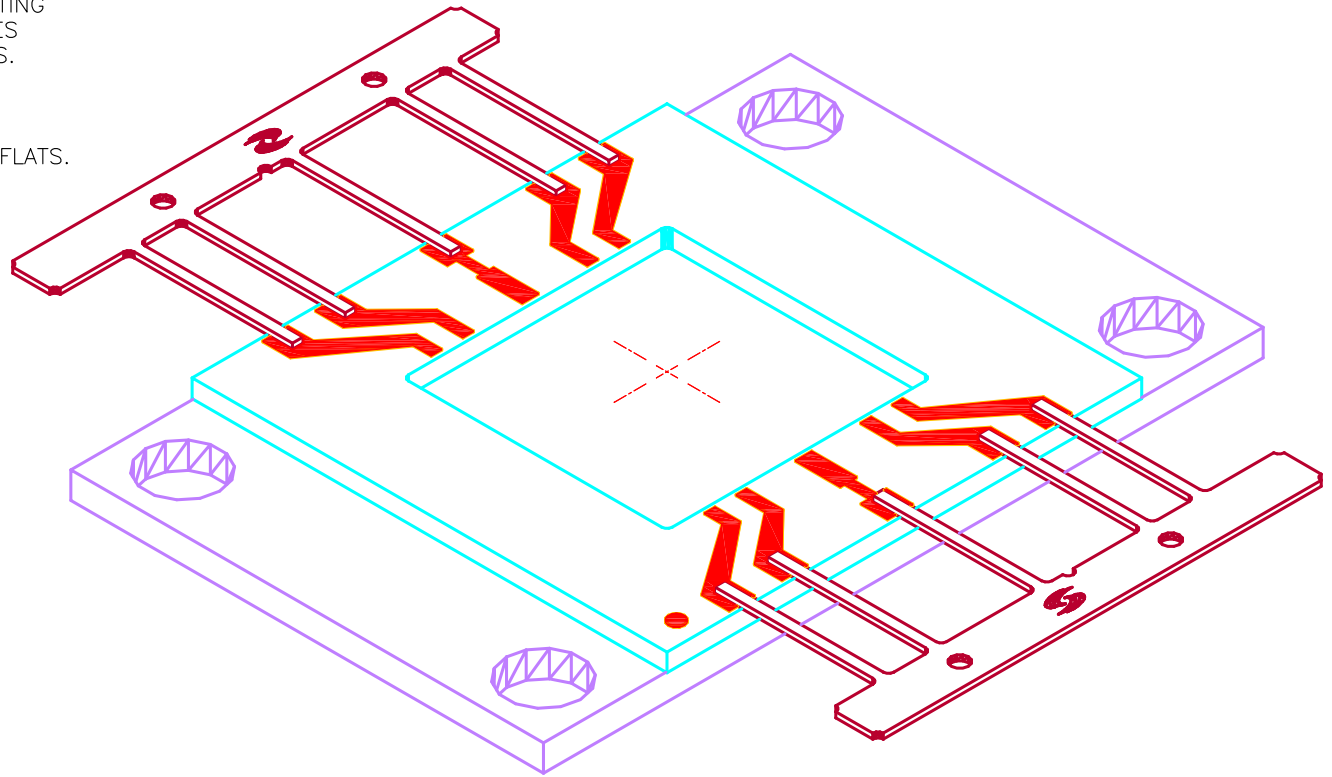

UNLESS OTHERWISE SPECIFIED ● DIMENSIONS ARE IN INCHES [MM] ● TOLERANCES: ANGLES +/- 1 DEG 4 PL DECIMALS ±.0005 [.013] 3 PL DECIMALS ±.005 [.13] 2 PL DECIMALS ±.01 [.25]	DRAFTER DONALD PEHLE	DATE 06/14/13	 6335 Ferris Square, Suite C San Diego, CA 92121		
	PROJECT ENGINEER TIM GOING	DATE 06/14/13			
	CHECKER MARIO ORTIGUERRA	DATE 06/14/13	10 LEAD LAMINATED PACKAGE DC TO 23 GHz		
	MARKETING TIM GOING	DATE 06/14/13			
QA DONALD PEHLE	DATE 06/14/13	SIZE A	CAGE CODE OHZT6	DRAWING NO LL6845-10-2	REV -
		SCALE NONE	LL6845-10-2_1		SHEET 1 OF 2

